




Industry Leading 30 Years Product and Performance Warranty

DNA-108-BF10-415W
Residential | Commercial

405W | 410W | 415W

Our DNA Split Cell Series uses advanced selective emitter PERC technology with thin film layers to improve heat tolerance, maximize energy harvest, minimize resistive loss, and use 5% more of the available active area for optimal power performance.

Linear Performance Warranty

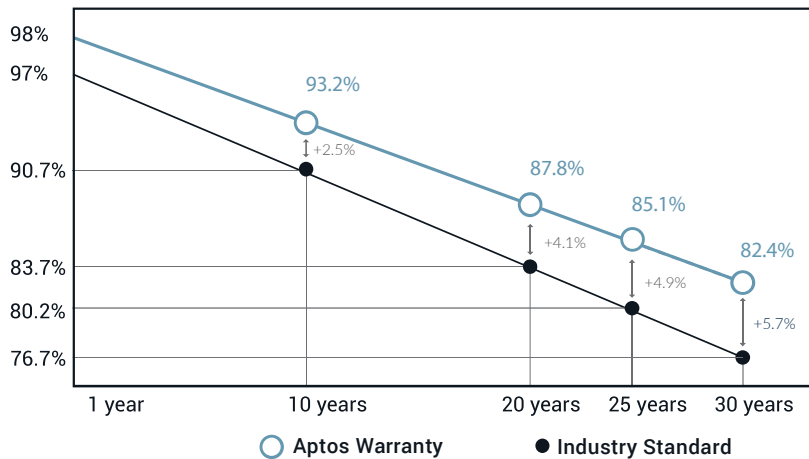

Designed & Engineered In Silicon Valley

Key Features



Advanced Technology
Patented DNA™ technology boosts power performance & module efficiency.



Miami-Dade Approved
Maximum Durability: LEVEL 6 SALT MIST Tested, 5400 Pa Wind Load Certified Panels.




Awards
Winners of the Leadership in Solar Energy award for three consecutive years and listed as one of the Top Solar Products from 2021-2022.



Bankable Investment
Comprehensive warranty that covers both **30-year product** and **30-year power** performance.



Aesthetics
All black design with advanced split cell technology features 10 ultra-thin busbars that allow for less resistance and greater energy harvest.

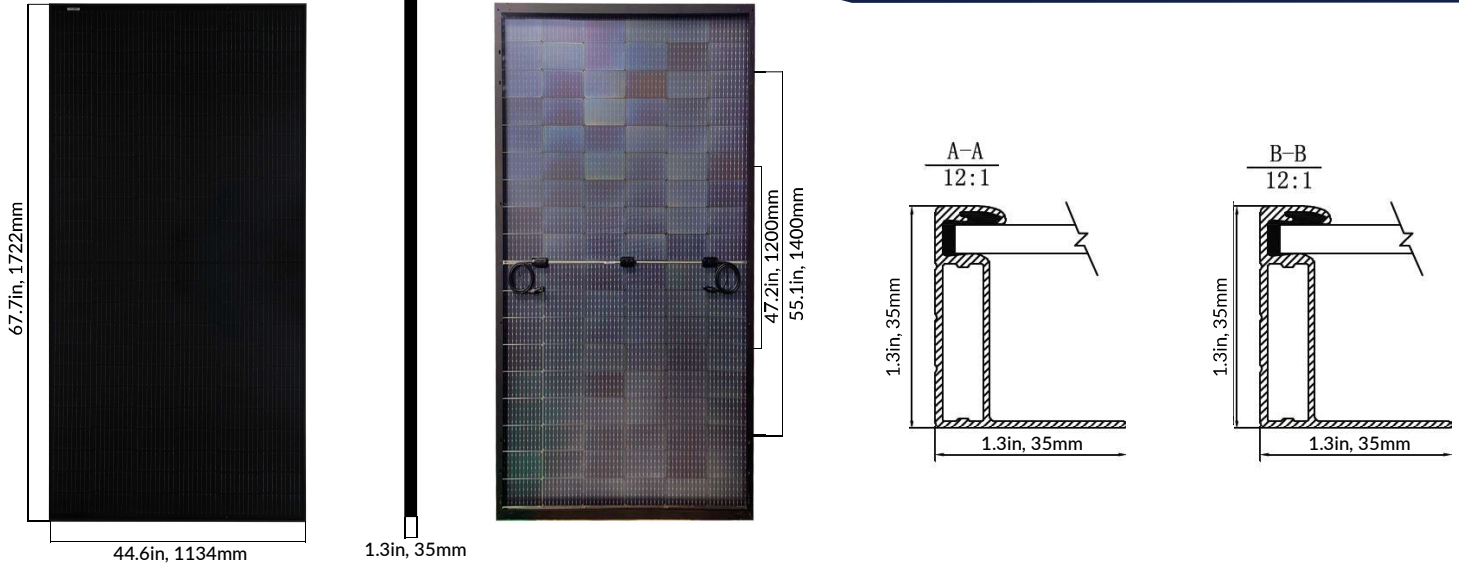


Electrical Specifications	DNA-108-BF10-400W		DNA-108-BF10-405W		DNA-108-BF10-410W		DNA-108-BF10-415W	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Rated Output P_{mp} (W)	400W	299W	405W	303W	410W	307W	415W	311W
Open Circuit Voltage V_{oc} (V)	37.18	35.14	37.27	35.22	37.36	35.31	37.45	35.39
Short Circuit Current I_{sc} (A)	13.50	11.98	13.63	12.10	13.77	12.22	13.90	12.34
Rated Voltage V_{mp} (V)	32.01	28.81	32.11	28.88	32.21	28.95	32.30	29.02
Rated Voltage I_{mp} (A)	12.49	10.39	12.61	10.49	12.72	10.60	12.84	10.70
Module Efficiency	20.48%		20.74%		20.99%		21.25%	

STC for front-face of panel: 1000 W/m², 25°C, measurement uncertainty \pm 3%
 NOCT for front-face of panel: 800W/m², 45°C, Wind speed 1 m/s

Mechanical Properties	
Cell Type	SE-PERC
Glass	3.2mm, anti-reflection coating, high transmission, low iron, tempered glass
Frame	Anodized Aluminum Alloy
Junction Box	IP68
Dimensions	67.7 X 44.6 X 1.3 in, 1722 X 1134 X 35 mm
Weight	48.5 lbs
Output Cable	4mm ² (EU)12AWG, 39.37in
Cable Length	47.2in, 1200mm
Connector Type	Staubli EVO2

Bifacial Output-Rearside Power Gain				
5%-Maximum Power (Pmax)	400W	425W	431W	435W
5%-Module Efficiency STC(%)	21.51%	21.78%	22.05%	22.31%
15%-Maximum Power (Pmax)	460W	467W	472W	477W
15%-Module Efficiency STC(%)	23.56%	23.85%	24.15%	24.44%
25%-Maximum Power (Pmax)	500W	506W	513W	518W
25%-Module Efficiency STC(%)	25.60%	25.93%	26.25%	26.57%

Test Operating Conditions	
Maximum Series Fuse	30A
Maximum System Voltage	1,500 VDC (UL&IEC)
Maximum Load Capacity (Per UL 1703)	5400 PA Snow Load / 5400 Pa Wind Load
Fire Performance Type	Type 1

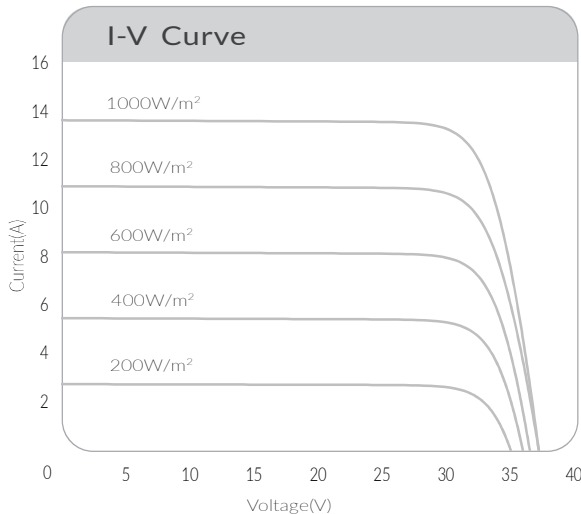

Temperature Coefficients	
Temperature Coefficients P_{mp}	-0.32%/°C
Temperature Coefficients I_{sc}	+0.045%/°C
Temperature Coefficients V_{oc}	-0.27%/°C
Normal Operating Cell Temperature (NOCT)	45°C \pm 2°C

Packaging Configuration	
Modules per Pallet	31
Pallets per 40ft. Container	26
Pallet Dimensions	68.97 X 44.48 X 49.76 in
Pallet Weight (lbs)	1503.5
Modules per 40ft. Container	806

Certifications			
UL61730-1 UL61730-2	IEC61730-1 IEC61730-2		